

# Rear Mount LCD

## Wide Temperature Range LCD



8.4"


### Specifications



Model Name	R08L200-RMT1WT
Viewable Size Image	8.4"
Active Display Area(mm)	170.4 (H) x 127.8 (V)
Pixel Pitch(mm)	0.213 (H) x 0.213 (V)
Number of Pixels	800 x 600
Contrast Ratio	600:1(typ.)
Display Color	16.2 M
Brightness(cd/m <sup>2</sup> )	450
Viewing Angle(CR>=10)	-80~80 (H); -60~80 (V)
Synchronization Range Horizontal/Vertical	31.5~46.9KHz/60~75Hz
Recommended Resolution	800x600@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	15W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, SAW
System Operating temp	-20°C~65°C

Remarks:R08L200 series= VGA input only  
R08L230 series= VGA+Video Input

### Mechanical Drawing

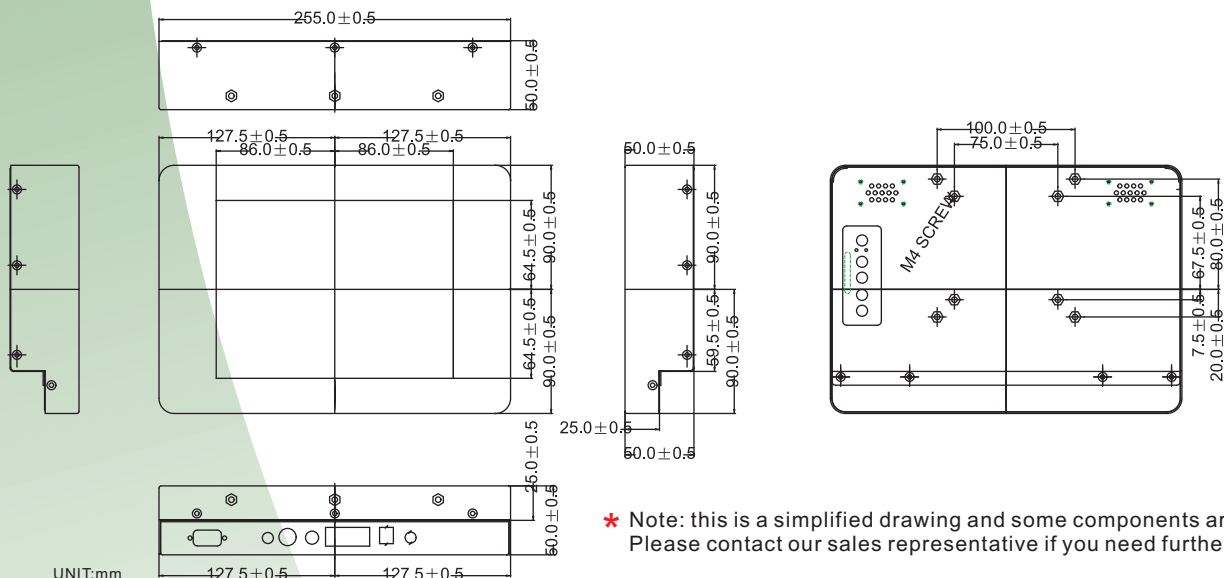

Rev.	Reasons	Revised Date
1.2	Spec change	Sep-19-11
1.3	Spec change	Nov-14-12
1.4	Spec change	Apr-19-13