

Rear Mount LCD

Wide Temperature Range LCD



10.4"


Specifications



Model Name	R10L100-RMA1WT
Viewable Size Image	10.4"
Active Display Area(mm)	211.2 (H) x 158.4 (V)
Pixel Pitch(mm)	0.264 (H) x 0.264 (V)
Number of Pixels	800 x 600
Contrast Ratio	500:1(typ.)
Display Color	16.2 M
Brightness(cd/m ²)	400(typ.)
Viewing Angle(CR>=10)	-80~80(H);-60~80(V)
Synchronization Range	
Horizontal/Vertical	31.5~46.9KHz/60~75Hz
Recommended Resolution	800 x 600@60Hz, 75 Hz
Signal Connector	15 pin D-Sub
Power Source	12 V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	18 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, SAW, IR
System Operating Temp	-20°C~65°C

Remarks:R10L600 series= VGA input only
R10L630 series= VGA+Video Input

Mechanical Drawing

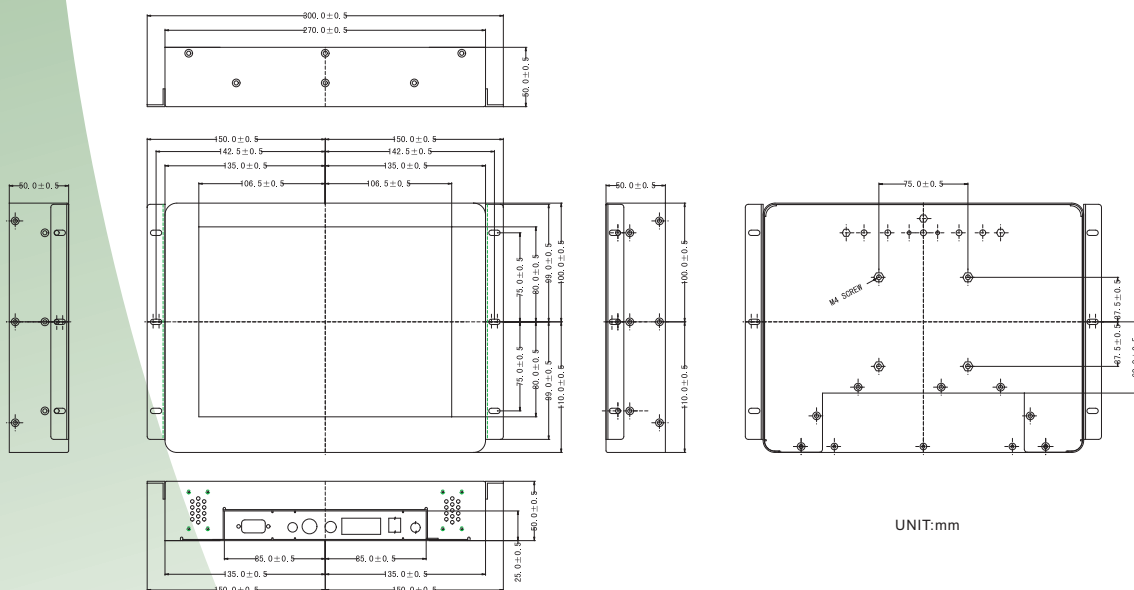

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.1	Spec change	Sep-20-11
1.2	Spec change	Nov-14-12
1.3	Spec change	Apr-19-13