

Rack Mount LCD

Rack Mount LCD



15" (7U)

Specifications






| | |
|---|--|
| Model Name | R15L100-RKA1 |
| Viewable Size Image | 15" |
| Active Display Area(mm) | 304.128(H) x 228.096(V) |
| Pixel Pitch(mm) | 0.297(H) x 0.297(V) |
| Number of Pixels | 1024 x 768 |
| Contrast Ratio | 700:1(typ.) |
| Display Color | 16.2M |
| Brightness(cd/m ²) | 550(typ.) |
| Viewing Angle(CR>=10) | -80~80(H);-70~70(V) |
| Synchronization Range Horizontal/Vertical | 31.5~60.0KHz/60~75Hz |
| Recommended Resolution | 1024x768@60Hz,75Hz |
| Signal Connector | 15 pin D-Sub |
| Power Source | 12V DC in, with External AC to DC Adapter(100~240V AC) |
| Power Consumption | 20W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | No |
| Optional Touch Screen | Resistive, Capacitive, SAW,IR |

Remarks:R15L100 series= VGA input only

R15L110 series= VGA+Video Input

Mechanical Drawing

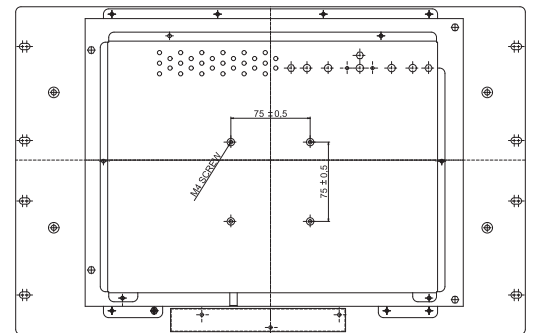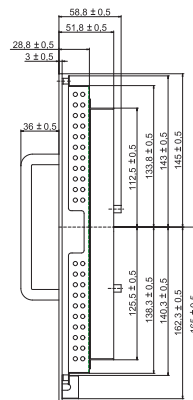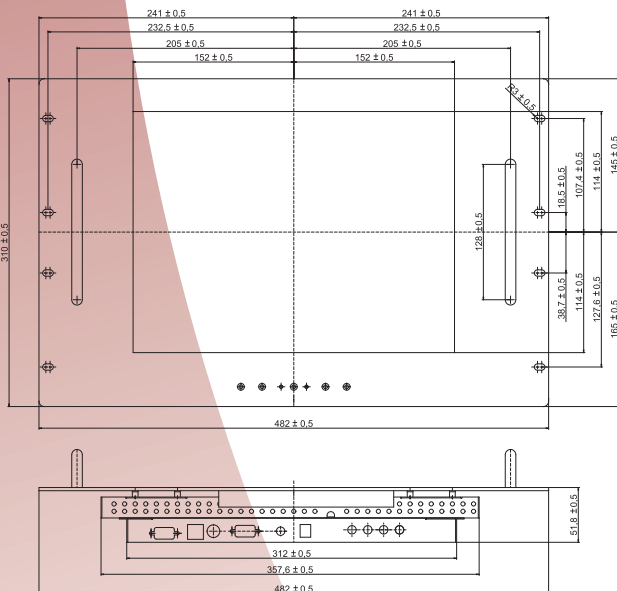

UNIT:mm

| Rev. | Reasons | Revised Date |
|------|----------------|--------------|
| 1.1 | Spec change | Aug-04-11 |
| 1.2 | Change picture | Jun-05-13 |
| 1.3 | Spec change | Dec-02-13 |

www.primarynetworks.co.uk

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

