

IP65 Solution



17"

Specifications




Model Name	S17L500-IPA1WT
Viewable Size Image	17"
Active Display Area(mm)	337.920 (H) x 270.336(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1280 x 1024
Contrast Ratio	1000:1 (typ.)
Display Color	16.7M
Brightness(cd/m ²)	350
Viewing Angle(CR>=10)	-85~85(H); -80~80(V)
Synchronization Range	
Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1280x1024@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	35W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW*
System Operating temp	-20°C~65°C

Remarks: S17L500 series= VGA input only

S17L540 series= VGA+Video Input

*When adding SAW touch, the IP grade will be IP54

Mechanical Drawing

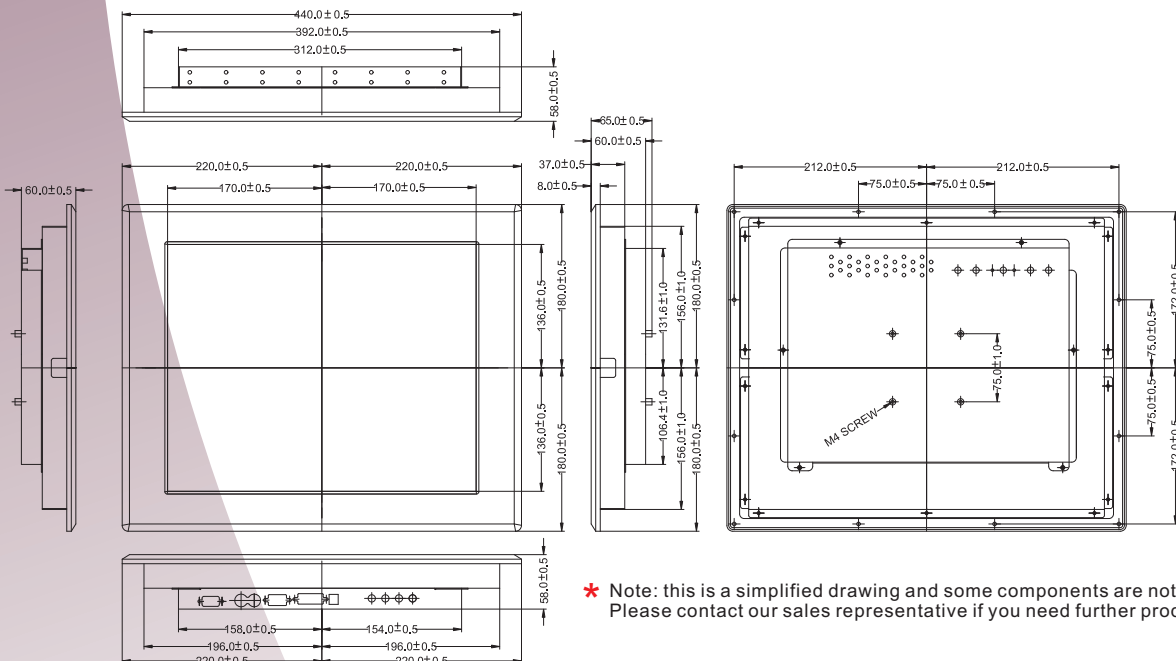

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.1	Spec change	Nov-14-12
1.1	Spec change	Apr-19-13
1.1	Model name	Jun-10-13