


IP65 Solution

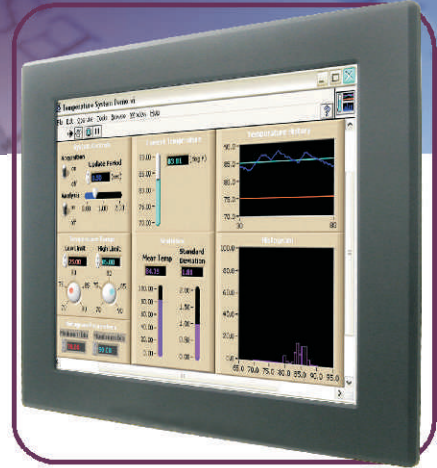

15"

Specifications

RoHS
COMPLIANT
2002/95/EC


Model Name	R15L100-IPA1
Viewable Size Image	15"
Active Display Area(mm)	304.128(H)x228.096(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	500:1(typ.)
Display Color	16.2M(8bits+FRC)
Brightness(cd/m ²)	550(typ.)
Viewing Angle(CR>=10)	-80~80(H);-70~70(V)
Synchronization Range	
Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	31W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW*

Remarks:R15L100 series= VGA input only

R15L110 series= VGA+Video Input

*When adding SAW touch, the IP grade will be IP54

Mechanical Drawing

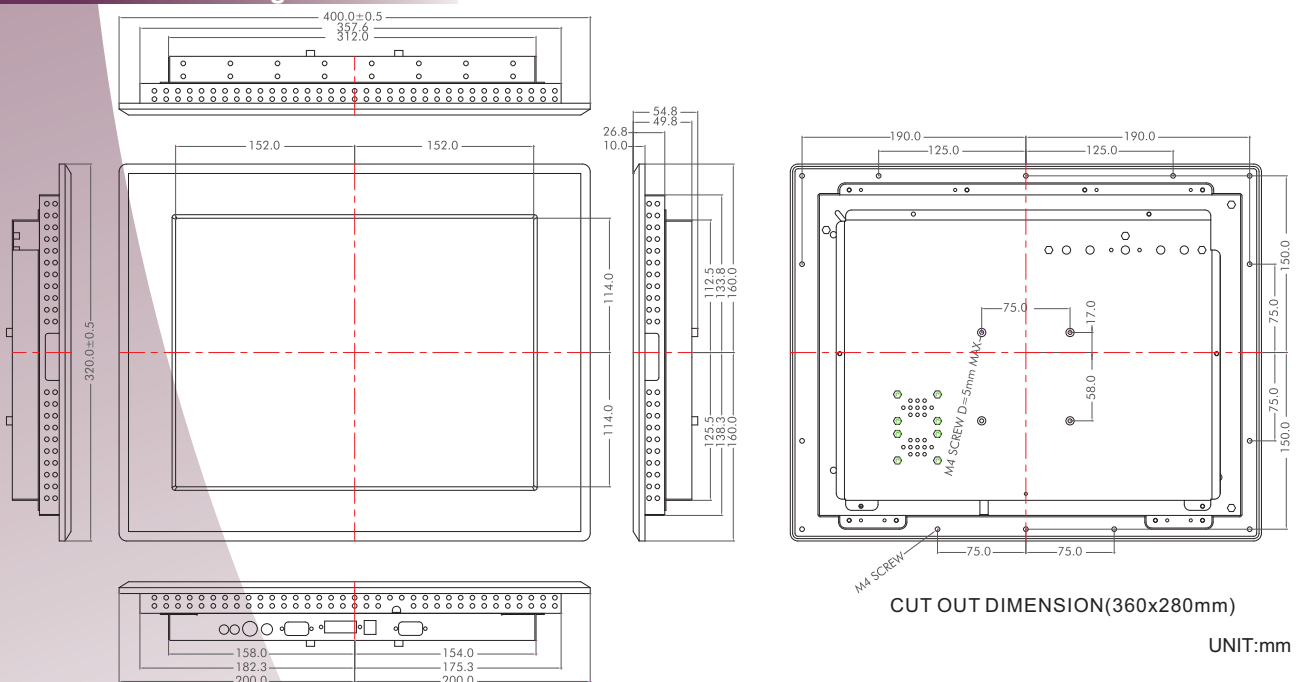

CUT OUT DIMENSION(360x280mm)

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

		Revised Date
1.1	Update Drawing	May-29-12
1.2	Spec change	Jun-04-13
1.3	Pic change	Aug-08-13