

IP65 Solution



15"

Specifications




Model Name	R15L100-IPA3WT
Viewable Size Image	15"
Active Display Area(mm)	304.128 (H) x 228.096(V)
Pixel Pitch(mm)	0.297 (H) x 0.297(V)
Number of Pixels	1024 x 768
Contrast Ratio	700:1(typ.)
Display Color	16.2M
Brightness(cd/m ²)	400
Viewing Angle(CR>=10)	-80~80(H);-60~80(V)
Synchronization Range	
Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024 x 768@60 Hz, 75 Hz
Signal Connector	15 pin D-Sub
Power Source	12 V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	23 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW*
System Operating temp	-20°C~65°C

Remarks:R15T600 series= VGA input only

R15T630 series= VGA+Video Input

*When adding SAW touch, the IP grade will be IP54

Mechanical Drawing

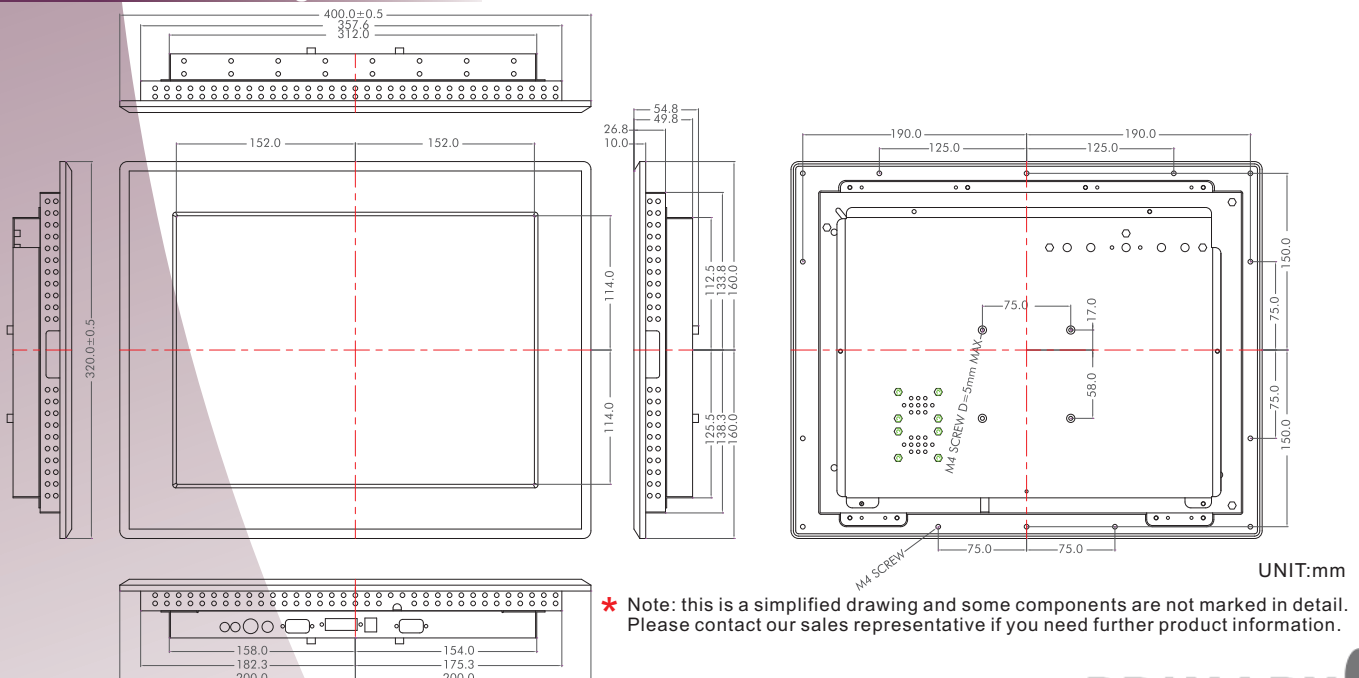

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.1	Update Drawing	May-29-12
1.2	Spec change	Nov-14-12
1.3	Spec change	Apr-19-13