

## P-Cap Panel Mount LCD Front side IP65



### 15" P-Cap LCD


#### Specifications

**RoHS  
COMPLIANT  
2002/95/EC**

Model Name	R15L600-PPA3HB
Viewable Size Image	15"
Active Display Area (mm)	304.1 (H) x 228.1 (V)
Pixel Pitch (mm)	0.297 (H) x 0.297 (V)
Number of Pixels	1024 x 768
Contrast Ratio	700:1 (typ.)
Display Color	16.2M (6bit+FRC)
Brightness (cd/m <sup>2</sup> )	1000 (typ.)
Viewing Angle (CR>=10)	-80~80; -70~70
Synchronization Range Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Touch Screen	Projective Capacitive multi-touch
Operating Temperature	0 deg. C to 50 deg. C

Remarks: R15L600 series= VGA input only  
R15L630 series= VGA+Video Input

#### Mechanical Drawing

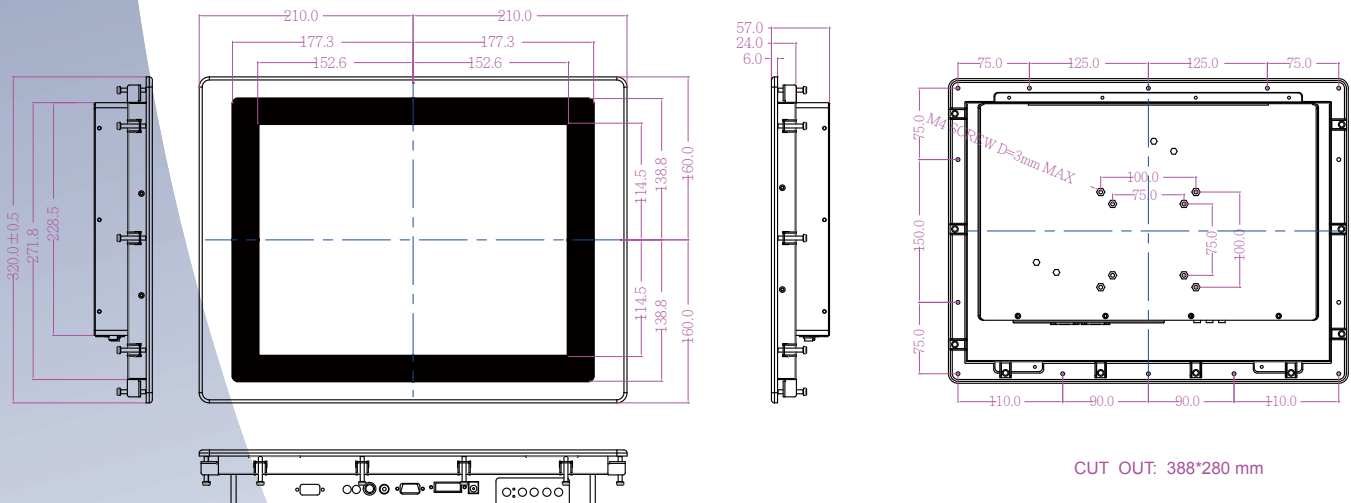

CUT OUT: 388\*280 mm

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Revised Date: 10/29/2015