IP65 Solution

17”

RoHS COMPLIANT 2002/95/EC

Specifications

Model Name	S17L500-IPA1TR
Viewable Size Image	17"
Active Display Area(mm)	337.92(H)x270.34(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)
Number of Pixels	1280x1024
Contrast Ratio	1000:1(typ.)
Display Color	16.7M
Brightness(cd/m^2)	375(typ.)
Viewing Angle(CR>=10)	-85~85(H);-80~80(V)
Synchronization Range Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280x1024@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive,Capacitive,SAW*, IR

Remarks:S17L500 series= VGA input only
S17L540 series= VGA+Video Input

Mechanical Drawing

8 mm front bezel with Resistive Touch, Glass

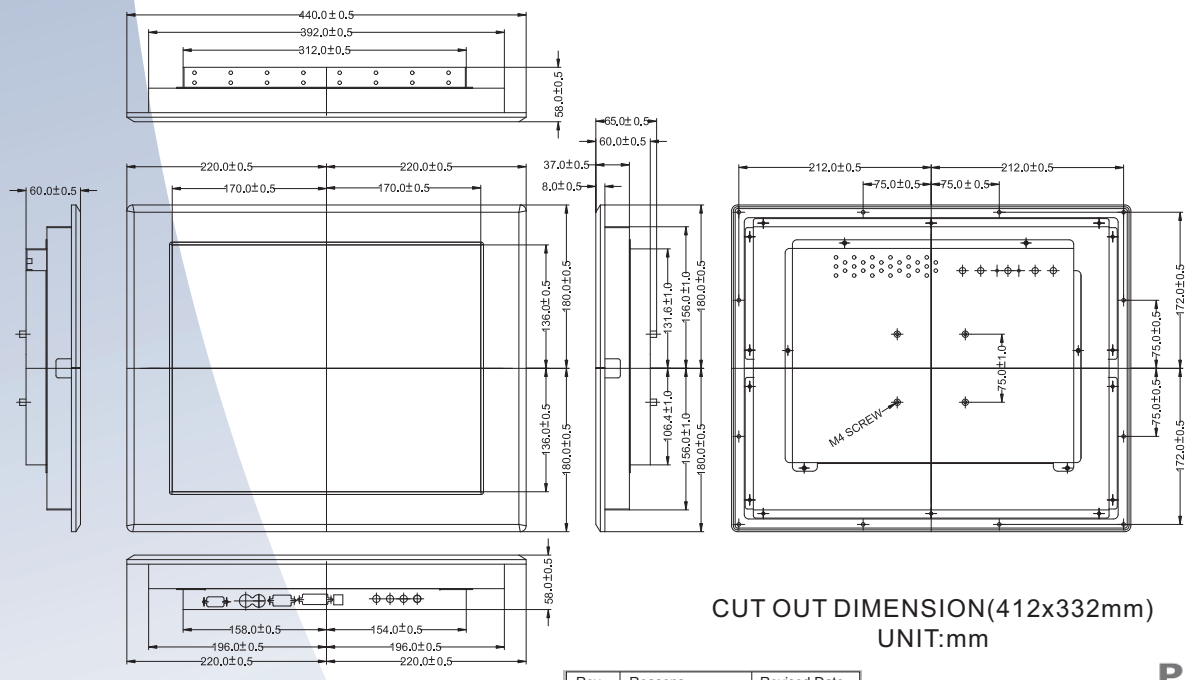

CUT OUT DIMENSION(412x332mm)
UNIT:mm

Rev.	Reasons	Revised Date
1.3	Change picture	Mar-19-13
1.4	Change picture	May-09-13
1.5	Change picture	Jun-03-13

PRIMARY NETWORKS

Mechanical Drawing

10 mm front bezel with Capacitive Touch, SAW Touch, IR Touch

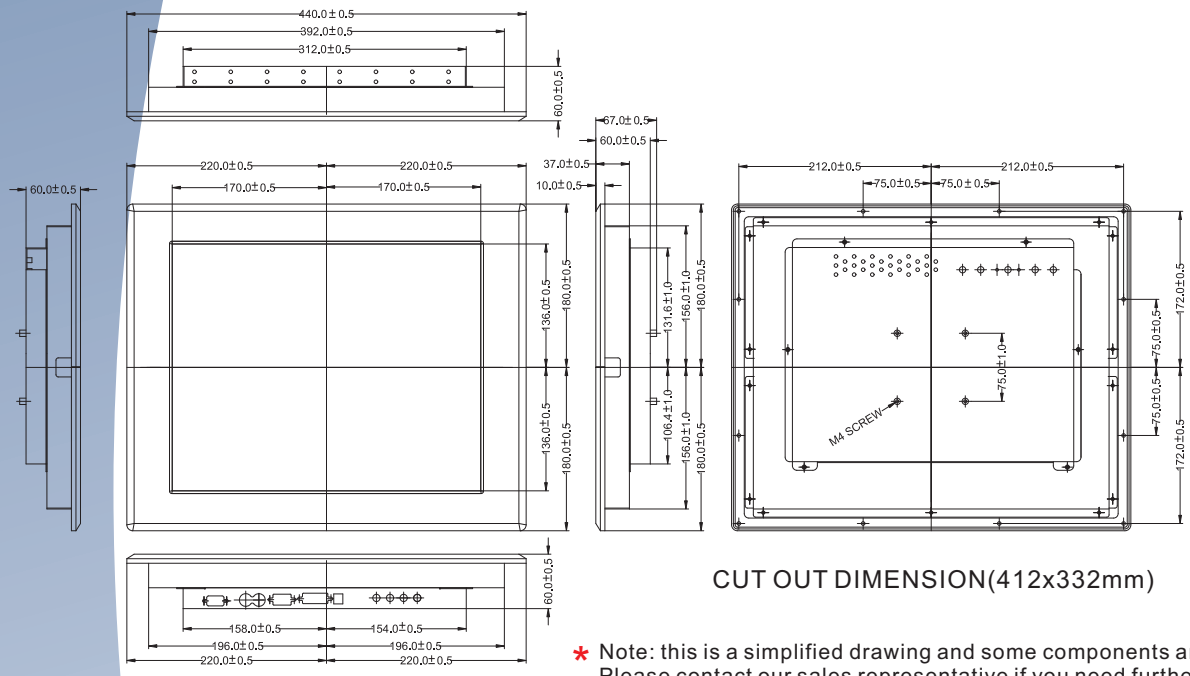

CUT OUT DIMENSION(412x332mm)

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Application