Panel Mount LCD

IP65 Solution

24"(16:9)

RoHS COMPLIANT 2002/95/EC

Specifications

Model Name	W24L100-IPA1
Viewable Size Image	24"(16:9)
Active Display Area(mm)	531.36(H)x298.89(V)
Pixel Pitch(mm)	0.27675(H)x0.27675(V)
Number of Pixels	1920x1080
Contrast Ratio	3000:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m^2)	250(typ.)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1920x1080@60Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	40W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive

Remarks:W24L100series= VGA Input only
W24L110 series= VGA+Video Input

Mechanical Drawing

10 mm front bezel with Touch or Glass

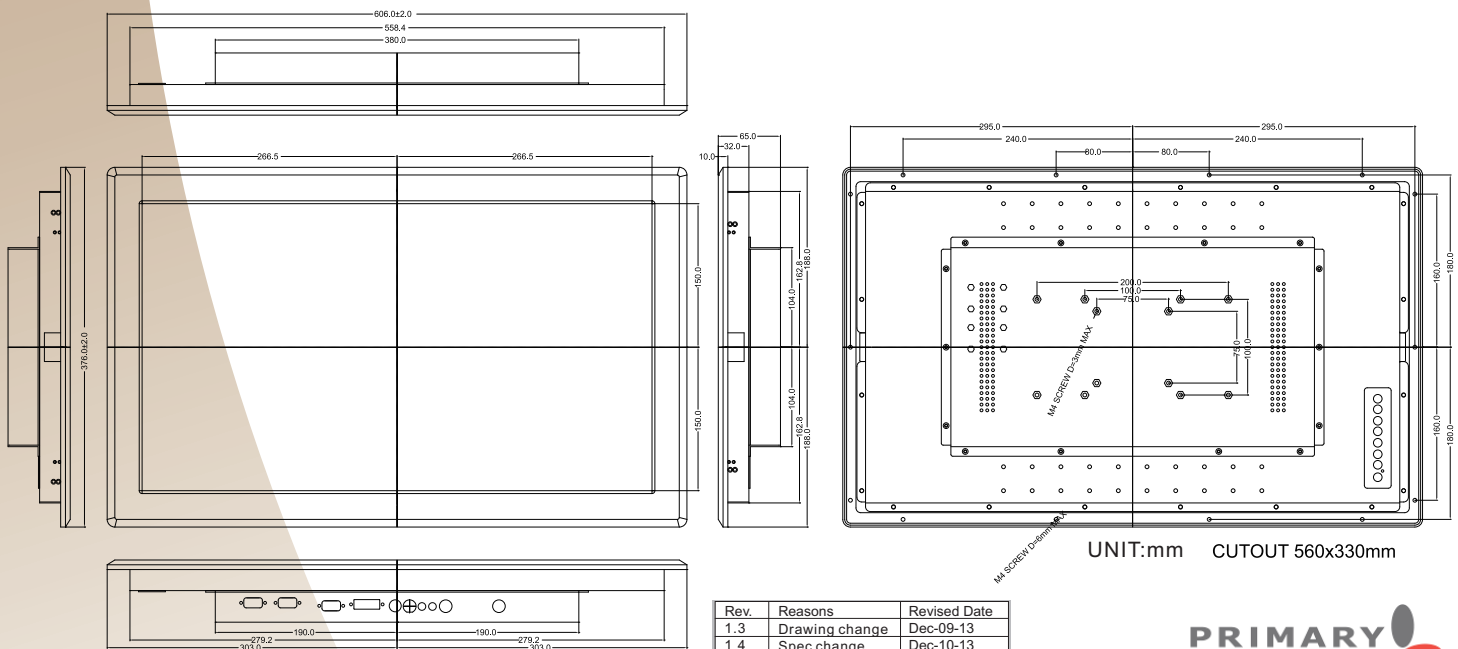

UNIT:mm CUTOUT 560x330mm

Rev.	Reasons	Revised Date
1.3	Drawing change	Dec-09-13
1.4	Spec change	Dec-10-13
1.5	Drawing change	Jan-02-14

PRIMARY NETWORKS