

Rear Mount LCD

Wide Temperature Range LCD

6.5"

Specifications

RoHS
COMPLIANT
2002/95/EC


Model Name	R06L200-RMA1WT
Viewable Size Image	6.5"
Active Display Area(mm)	132.48 (H) x 99.36 (V)
Pixel Pitch(mm)	0.069 (H) x 0.207 (V)
Number of Pixels	640x480
Contrast Ratio	450:1 (typ.)
Display Color	262,144 (6bits/color)
Brightness(cd/m ²)	400
Viewing Angle(CR>=10)	-70~70(H);-60~60(V)
Synchronization Range	
Horizontal/Vertical	31.5~37.5KHz/60~75Hz
Recommended Resolution	640x480@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	15W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	No
System Operating temp	-20°C~65°C

Remarks:R06T200 series= VGA input only

R06T230 series= VGA+Video Input



Mechanical Drawing

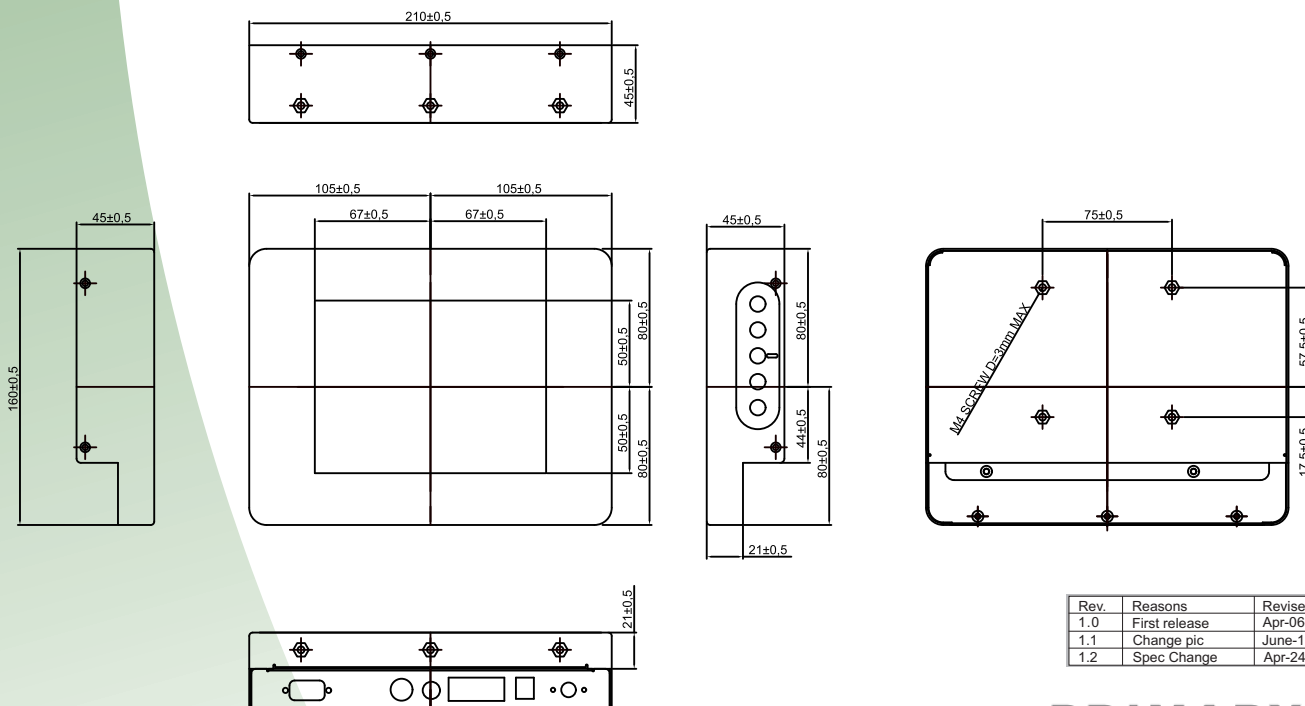

Rev.	Reasons	Revised Date
1.0	First release	Apr-06-10
1.1	Change pic	June-10-13
1.2	Spec Change	Apr-24-14

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

www.primarynetworks.co.uk

