

# Full IP67 Chassis LCD

## 15" (Stainless Design)




### Specifications

Model Name	R15L600-67C3				
Viewable Size Image	15"				
Active Display Area(mm)	304.128 (H) x 228.096 (V)				
Pixel Pitch(mm)	0.297(H)x0.297(V)				
Number of Pixels	1024x768				
Contrast Ratio	700:1(typ.)				
Display Color	16.2M				
Brightness(cd/m <sup>2</sup> )	250(typ.)				
Viewing Angle(CR>=10)	-80~80(H) ; -70~70(V)				
Synchronization Range	31.5~60.0KHz/60~75Hz				
Horizontal/Vertical					
Recommended Resolution	1024x768@60Hz, 75Hz				
Signal Connector	15 pin D-Sub				
I/O	3 pin Power cable(IP67 connector); 10 pin VGA cable (IP67 connector); Optional 10 pin RS232 or USB cable(IP67 connector)				
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)				
Power Consumption	25W typical, normal operation				
Power Management	VESA DPMS Compliant				
Plug & Play	VESA DDC 1/2B				
Optional Touch Screen	Resistive,Capacitive				
Optional video	Yes				
Stainless Material	CNS	JIS	ASTM	AISI	DIM
	304	SUS304	S30400	304	1.4301

\*Due to Panel material's deviation, different panel supplier will set different specific variance range to optical characteristics. The factors of time used, Lamp current, Ambient temperature will influence the optical measurements.



\*With TR + PT5W

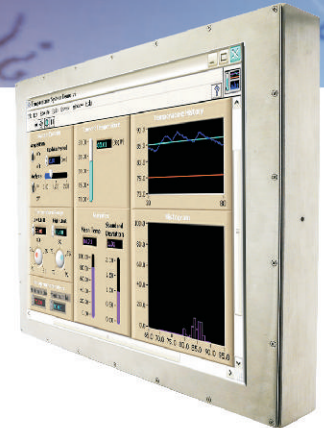


Standard : brushed stainless

Optional : black,high polish  
vanished coating

### Mechanical Drawing

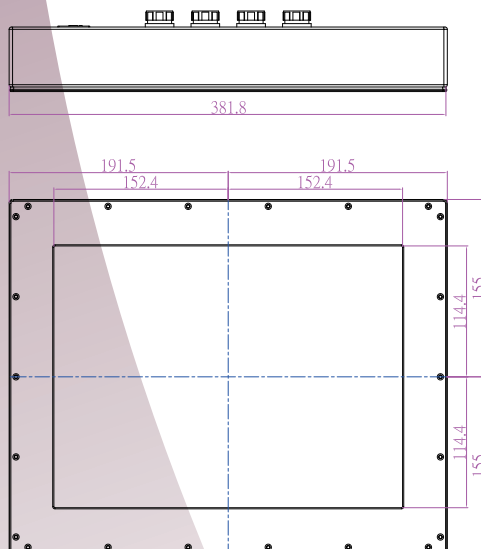

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

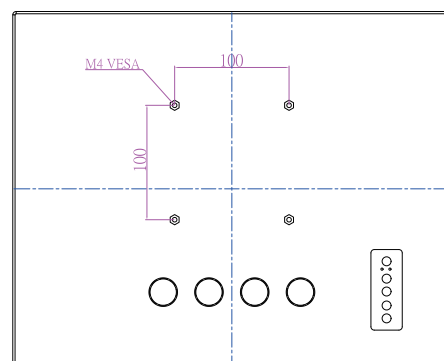


UNIT:mm

# Full IP67 Chassis LCD

## IO Layout

### Back Side (I/O)

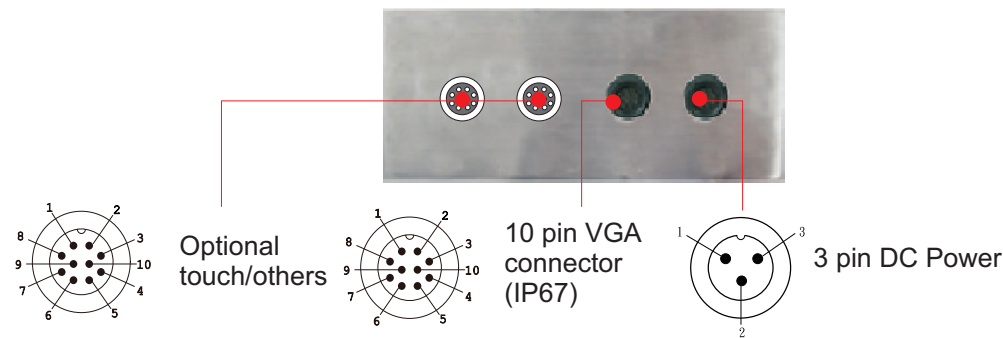


## Cable List

LCD	IP67 connector	PC side IO type
DC power	3pin	Female(2.5 fai)
USB(optional)	10pin	Male(type A)
RS232(optional)	10pin	Female(D-sub 9)
VGA	10pin	Male(D-sub 15)

## IP67 Cable/Pin Define

### DC Power

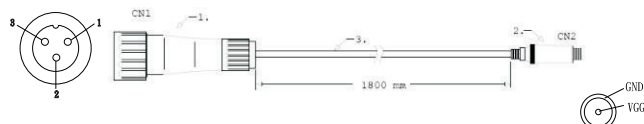

Pin No.	Symbols	Color	Pin No.	Symbols	Color
CN1-1	VCC	Red	CN2	VCC	Red
CN1-3	GND	Black	CN2	GND	Black
CN1-2	Shield	Black	CN2	Shield	Black

### RS232




Pin No.	Symbols	Color	Pin No.	Symbols	Color
CN1-1	DCD-CON2	Green	CN2-1	DCD-CON2	Green
CN1-2	DSR-CON2	Brown	CN2-6	DSR-CON2	Brown
CN1-3	RXD-CON2	Red	CN2-2	RXD-CON2	Red
CN1-4	RTS-CON2	Orange	CN2-7	RTS-CON2	Orange
CN1-5	TXD-CON2	Blue	CN2-3	TXD-CON2	Blue
CN1-6	CTS-CON2	White	CN2-8	CTS-CON2	White
CN1-7	DTR-CON2	Purple	CN2-4	DTR-CON2	Purple
CN1-8	RI-CON2	Yellow	CN2-9	RI-CON2	Yellow
CN1-9	GND-CON2	Black	CN2-5	GND-CON2	Black
CN1-10	NC				

### USB



Pin No.	Symbols	Color	Pin No.	Symbols	Color
CN1-1	VCC	Red	CN2-1	VCC	Red
CN1-2	D-	White	CN2-2	D-	White
CN1-3	D+	Green	CN2-3	D+	Green
CN1-4	GND	Black	CN2-4	GND	Black
CN1-5	Shield		CN2-5	Shield	

### VGA



CN1		
Pin No.	Symbols	Color
1	R	Red
2	R-GND	Black
3	G	Green
4	G-GND	Black
5	B	Blue
6	B-GND	Black
7	SDA	Yellow
8	HS	Orange
9	VS	White
10	SCL	Brown

CN2		
Pin No.	Symbols	Color
1	R	Red
6	R-GND	Black
2	G	Green
7	G-GND	Black
3	B	Blue
8	B-GND	Black
12	SDA	Yellow
13	HS	Orange
14	VS	White
15	SCL	Brown
4	HS-GND	
5	NC	
9	NC	
10	NC	
11	VS-GND	