


# Rear Mount LCD

## Wide Temperature Range LCD

12.1"

### Specifications

**RoHS**  
COMPLIANT  
2002/95/EC

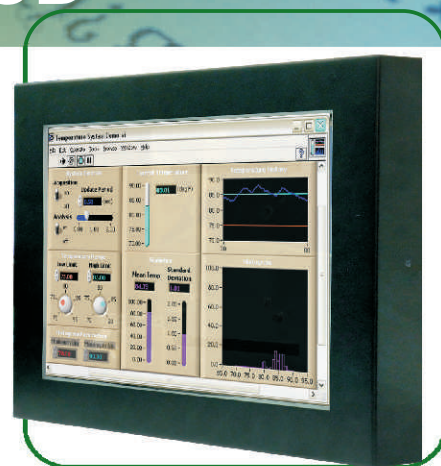

Model Name	R12L600-RMM2WT
Viewable Size Image	12.1"
Active Display Area(mm)	245.76 (H) x 184.32(V)
Pixel Pitch(mm)	0.240(H)x0.240(V)
Number of Pixels(DOT)	1024 x 768
Contrast Ratio	700:1(typ.)
Display Color	262.144K(6 bit/colors)
Brightness(cd/m <sup>2</sup> )	500(typ.)
Viewing Angle(CR>=10)	-80~80(H);-70~70(V)(typ.)
Synchronization Range Horizontal/Vertical	31.5~60KHz/60~75Hz
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	20W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, Capacitive, SAW,IR
System Operating temp	-20°C~65°C

Remarks:R12L600 series= VGA input only

R12L630 series= VGA+Video Input

### Mechanical Drawing

